

Magnetische Buttons und beleuchtete Aufnehmer für Kassen und deren Bediener

Button-Halter Cash-Terminal



Mindestabnahme: 100 Stück

Preis/Stück: € 8,00 netto

Brutto 9,52 EUR

Button Cash-Terminal



Mindestabnahme: 100 Stück


Preis/Stück: € 5,80 netto

Brutto 6,90 EUR



ctd europe gmbh
Hans-Schick-Str.
84375 Kirchdorf am Inn
Tel.: +49 (0) 8571 / 925 117 - 0
Fax: +49 (0) 8571 / 925 117 - 99
E-mail: info@ctd-online.de
www.ctd-online.de



Technische Details zum Halter

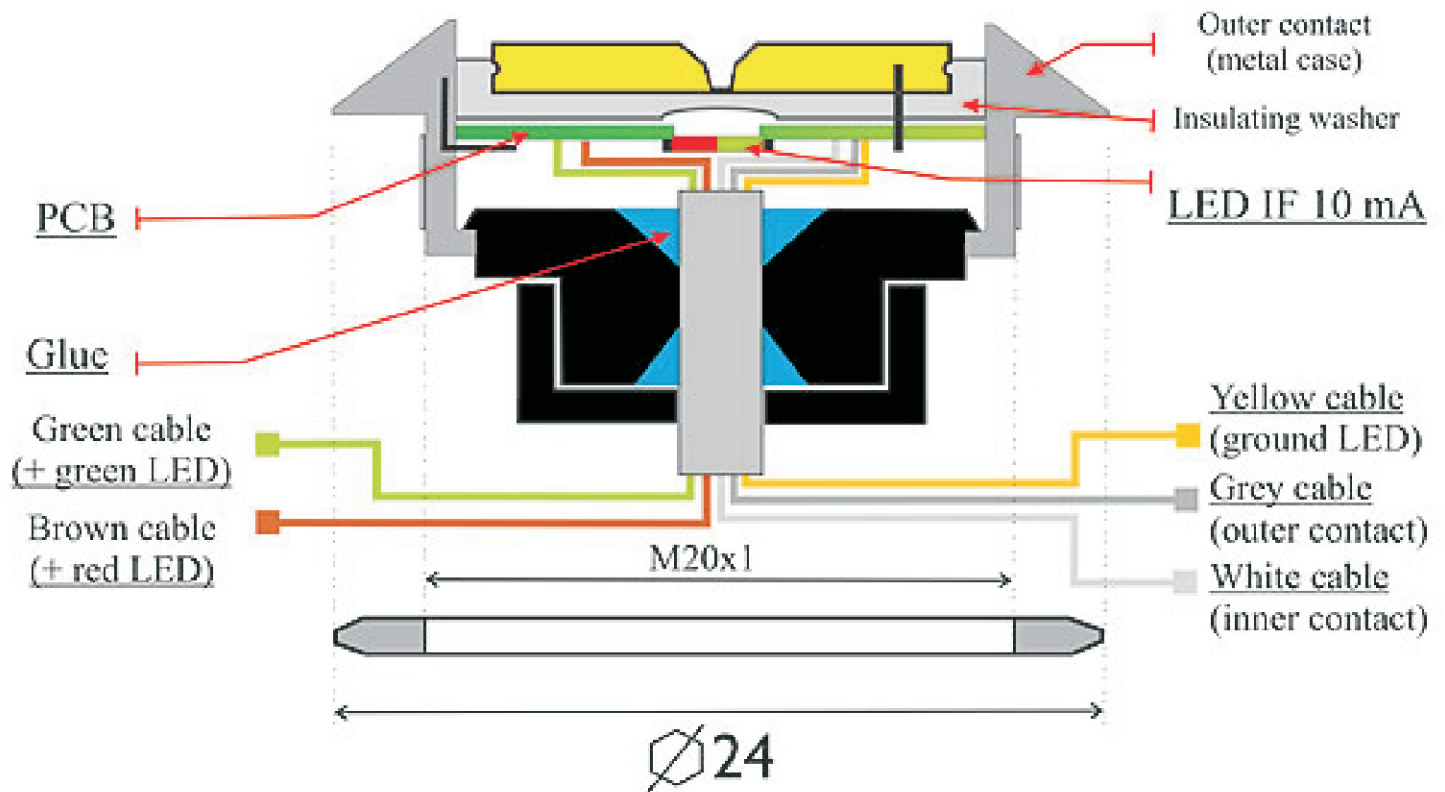

Third colour orange - according to the following diagram

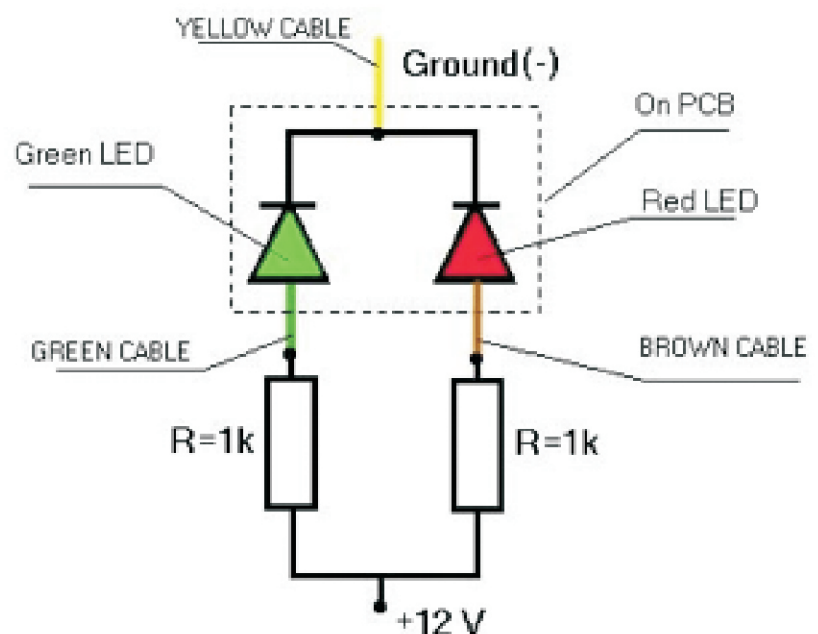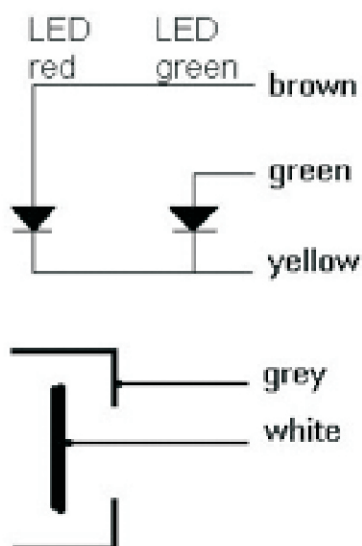

KPB-3025SURKCGKC

HYPER RED / GREEN

Features


- ✓ 3.0mmx2.5mm SMT LED, 1.1mm THICKNESS.
- ✓ BI -COLOR, LOW POWER CONSUMPTION.
- ✓ WIDE VIEWING ANGLE.
- ✓ IDEAL FOR BACKLIGHT AND INDICATOR.
- ✓ VARIOUS COLORS AND LENS TYPES AVAILABLE.
- ✓ PACKAGE : 2000PCS / REEL.

Description

The Hyper Red source color devices are made with DH InGaAlP on GaAs substrate Light Emitting Diode.

The Green source color devices are made with InGaAlP on GaAs substrate Light Emitting Diode.

Package Dimensions

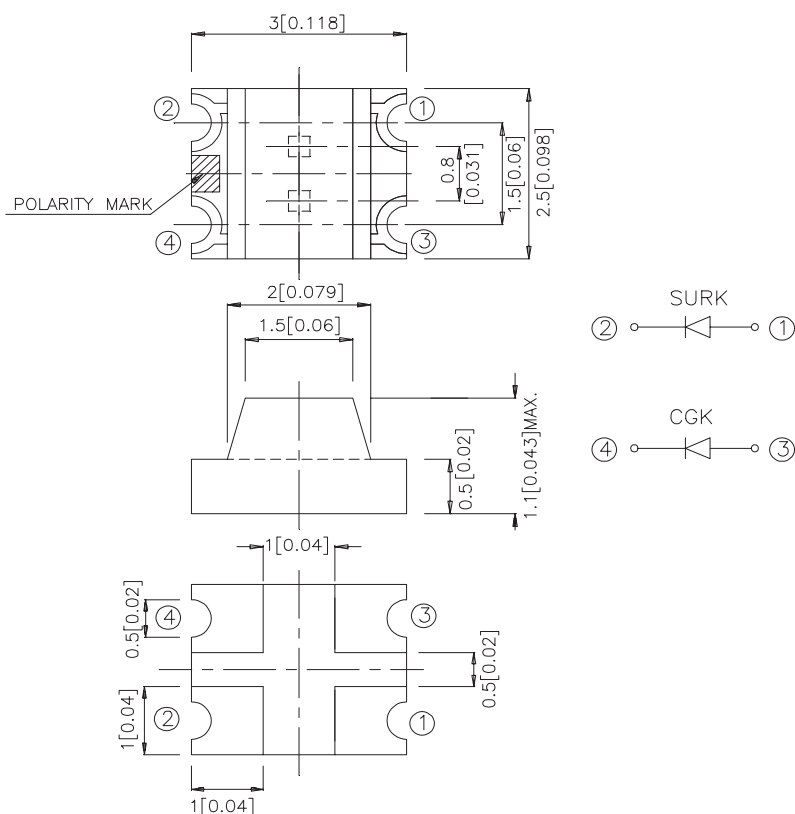

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.2 (0.0079)$ unless otherwise noted.
3. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 20 mA		Viewing Angle
			Min.	Typ.	2θ1/2
KPB-3025SURKCGKC	HYPER RED(InGaAlP)	WATER CLEAR	50	160	120°
	GREEN(InGaN)		10	40	

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C


Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
θ _{peak}	Peak Wavelength	Hyper Red Green	650 574		nm	I _F =20mA
θ _D	Dominate Wavelength	Hyper Red Green	635 570		nm	I _F =20mA
θ _{1/2}	Spectral Line Half-width	Hyper Red Green	28 20		nm	I _F =20mA
C	Capacitance	Hyper Red Green	35 15		pF	V _F =0V; f=1MHz
V _F	Forward Voltage	Hyper Red Green	1.95 2.1	2.5 2.5	V	I _F =20mA
I _R	Reverse Current	All		10	uA	V _R = 5V

Absolute Maximum Ratings at T_A=25°C

Parameter	Hyper Red	Green	Units
Power dissipation	170	105	mW
DC Forward Current	30	30	mA
Peak Forward Current [1]	185	150	mA
Reverse Voltage	5		V
Operating / Storage Temperature	-40°C To +85°C		






Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

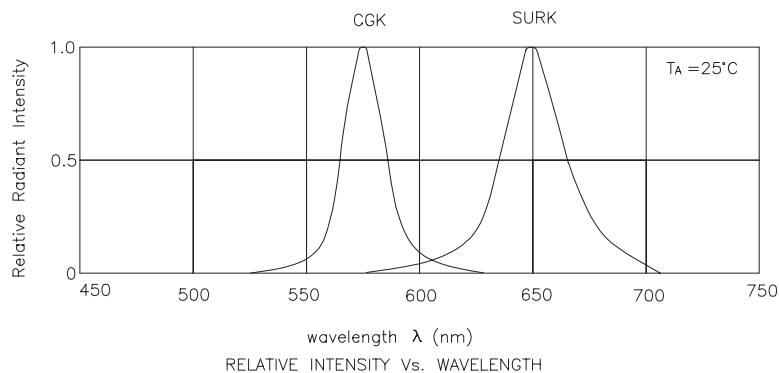

Hyper Red/ Green


KPB-3025SURKCGKC

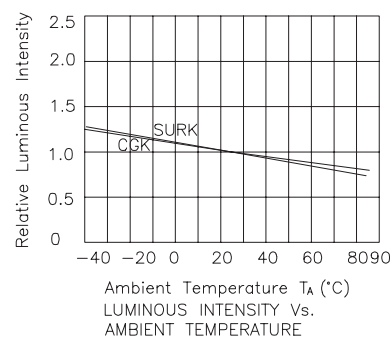


KPB-3025SURKCGKC

SMT Reflow Soldering Instruction

Number of reflow process shall be less than 2 times and cooling process to normal temperature is required between first and second soldering process.

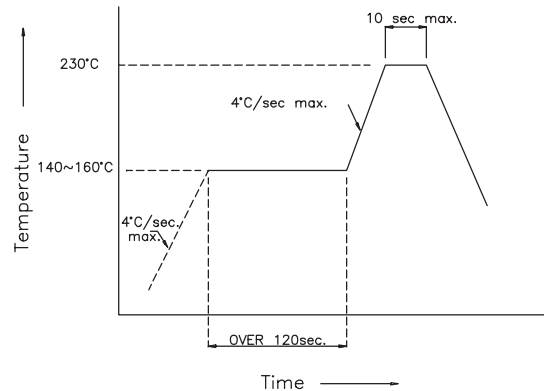

Recommended Soldering Pattern (Units : mm)

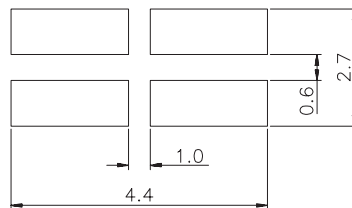

Tape Specifications (Units : mm)

